

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
12 February 2004 (12.02.2004)

PCT

(10) International Publication Number
WO 2004/013384 A1

(51) International Patent Classification: **C30B 15/10**
(21) International Application Number:
PCT/EP2003/008422

[JP/JP]: 3-2-16 Kitago Honda, Apt. D 101, Takefu-shi,
Fukui 915-0802 (JP). **TOGAWA, Takayuki** [JP/JP];
Porosupero Meson C0201, 2-20-73 Hiraide Takefu-Shi,
Fukui-Ken, 915-0803 (JP).

(22) International Filing Date: 30 July 2003 (30.07.2003)
(25) Filing Language: English
(26) Publication Language: English
(30) Priority Data:
2002-223999 31 July 2002 (31.07.2002) JP

(74) Agent: **STAUDT, Armin**; Edith-Stein-Strasse 22, 63075
Offenbach/Main (DE).

(81) Designated States (*national*): CN, NO, US.

(84) Designated States (*regional*): European patent (AT, BE,
BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU,
IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR).

(71) Applicants (*for all designated States except US*): **HER-
AEUS QUARZGLAS GMBH & CO. KG** [DE/DE];
Quarzstrasse 8, 63450 Hanau (DE). **SHIN-ETSU
QUARTZ PRODUCTS CO., LTD.** [JP/JP]; 22-2,
Nishi-Shinjuku 1-chome, Shinjuku-ku, Tokyo 160-0023
(JP).


Published:

— with international search report
— before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments

(72) Inventors; and
(75) Inventors/Applicants (*for US only*): **OHAMA, Yasuo**

*For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.*

(54) Title: **QUARTZ GLASS CRUCIBLE FOR PULLING UP SILICON SINGLE CRYSTAL AND METHOD FOR PRODUCING THE SAME**



(57) Abstract: An object of the invention is to provide a quartz glass crucible reduced in the generation of vibration occurring on the surface of a silicon melt and free from the generation of rough surface and cristobalite spots, yet capable of pulling up single crystal silicon stably and at high yield even in long-term operations; it is also an object to provide a method for producing the same. In a quartz glass crucible for pulling up single crystal silicon comprising a crucible base body having a bottom part and a straight shell part with an inner layer provided to the inner surface thereof, the quartz glass crucible is characterized by that said inner layer comprises a synthetic quartz glass layer from the lowest end to at least a height of 0.25H; a naturally occurring quartz glass layer or a mixed layer of naturally occurring quartz glass and synthetic quartz glass extended in a range of from at least 0.5H to 0.8H; and one selected from a synthetic quartz glass layer, a naturally occurring quartz glass layer, and a mixed quartz glass layer of naturally and synthetic quartz glass for the rest of the inner layer; wherein H represents the height from the lowest end of the bottom part to the upper end plane of the shell part. It also provides a method for producing the quartz glass crucible above.

Quartz Glass Crucible for Pulling up Silicon Single Crystal and Method for Producing the Same

- 5 The present invention relates to a quartz glass crucible for pulling up single crystal silicon, comprising a crucible base body having a bottom part and a side wall, with an inner layer provided to the inner surface thereof.

Furthermore the invention is related to a method for producing a quartz glass for pulling up single crystal silicon comprising a crucible base body having a bottom

- 10 part and a side wall enclosing an inner cavity portion, by setting a high temperature atmosphere inside the cavity portion of the quartz glass crucible base body being attached to a rotating mold, and supplying a silica powder into said high temperature atmosphere to form an inner layer on the inner surface of the crucible base body by melting and vitrifying the silica powder.
- 15 Conventionally, so-called Czochralski (CZ) method is widely employed heretofore as the production method for silicon single crystals. The CZ method comprises melting polycrystalline silicon in a crucible made of quartz glass, immersing a seed crystal of silicon single crystal into the silicon melt, gradually pulling up the seed crystal while rotating the crucible, and thereby growing the single crystal silicon
- 20 from the seed crystal as core. The single crystal that is produced in said CZ method should be of high purity and capable of producing silicon wafers at high yield; as the quartz glass crucible for use in the production, employed is a double-structured quartz glass crucible comprising an inner layer free from pores and an opaque outer layer containing pores.
- 25 With recent tendency of consuming longer time for the operation of pulling up single crystals with increasing diameter of silicon single crystals, quartz glass crucibles with higher purity are required. Accordingly, the present applicants have proposed a quartz glass crucible having a double structure comprising a transparent inner layer and an opaque outer layer, in which the inner layer is
- 30 formed with synthetic silica powder (for instance, Patent No. 2811290 and Patent

No. 2933404, etc.). A quartz glass crucible having an inner layer made from synthetic quartz glass is advantageous in that it is extremely low in impurity content, suffers very low generation of surface roughening or cristobalite spots on the inner surface during pulling up silicon single crystals, enables operation for a long time, and increases the yield of pulling up single crystals.

However, in case of melting polysilicon, when compared with crucibles made from naturally occurring quartz, the crucibles above having inner layers made of synthetic quartz glass tends to cause oscillation on the surface of the melt. In particular, such surface oscillation is frequently observed in the initial pulling up stages such as nucleation, formation of shoulders, and former stages of producing single crystal body part; and is disadvantageous in that it lowers productivity, due to increased time for nucleation, the generation of disordering in the crystals, causing re-melting, i.e., the so-called melt-back, and the like. In the light of such circumstances, the present inventors have proposed a multi-layer structured crucible having an opaque synthetic quartz glass preliminary layer interposed between a transparent inner layer made of synthetic quartz glass and an opaque bulk layer made of naturally occurring quartz glass (Japanese Patent Laid-Open No. 2001-348294). However, since multi-layer structured crucible uses expensive synthetic powder in large quantities, it suffered a disadvantage as such that it results expensive.

In the light of the aforementioned circumstances, the present inventors have extensively conducted studies, and as a result, it has been found that the surface vibration generated on the surface of the silicon melt is deeply related with the inner surface of the wall (straight shell part), and that the yield of pulling up single crystals is significantly related with the inner surface of the bottom part. Furthermore, by using naturally occurring quartz glass or a mixture of naturally occurring and synthetic quartz glasses for a specified part of the wall the quartz glass crucible that is used for pulling up silicon single crystals, it has been found that the generation of vibration on the surface of the silicon melt can be suppressed, and that it enables long stabilized operation using the crucible while suppressing the generation of surface roughening and cristobalite spots on the inner surface of the crucible by forming a specified range of the inner layer in the

vicinity of the bottom part of the crucible with synthetic quartz glass. The present invention has been accomplished based on these findings enabling pulling up of silicon single crystal at high yield. More specifically:

- 5 An object of the present invention is to provide a quartz glass crucible capable of pulling up silicon single crystal stably at high yield by suppressing the generation of vibration on the surface of silicon melt, without generating surface roughening and cristobalite spots on the inner surface of the crucible even for long operation.

Further object of the present invention is to provide a method for producing the quartz glass crucible above.

- 10 In order to achieve the objects above, the quartz glass crucible is characterized in that its inner layer comprises

- a) a first part made of a synthetic quartz extending from the bottom to at least a height of $0.25H$;
- 15 b) a second part made of a naturally occurring quartz glass or made of mixed quartz glass of naturally and synthetic quartz glass, extending in a range of from at least $0.5H$ to $0.8H$;
- c) and a residual part made of quartz glass selected from a synthetic quartz glass, a naturally occurring quartz, or a mixed quartz glass of naturally and synthetic quartz glass,

- 20 wherein H represents the height from the lowest side of the bottom part to the upper end plane of the wall.

The quartz glass crucible according to the present invention is a quartz glass crucible for pulling up single crystal silicon comprising a crucible base body with an inner layer provided to the inner surface of the bottom and the side wall, in which
25 said inner layer comprises, with respect to the height (H) from the lowest end of the bottom part to the upper end plane of the side wall, a first layer which is a synthetic quartz glass layer of at least up to a height of $0.25H$; a second layer made of naturally occurring quartz glass or a mixed quartz glass of naturally

occurring quartz glass and synthetic quartz glass extending over a range of at least from 0.5H to 0.8H; and the rest of the inner layer is formed by a residual layer consisting of one selected from synthetic quartz glass, a naturally occurring quartz glass, and a mixed quartz glass of naturally occurring quartz glass and

5 synthetic quartz glass.

By providing a part (second part) of the inner layer made of naturally occurring quartz glass or synthetic glass containing naturally occurring glass (i.e., a naturally occurring glass mixed with synthetic glass) on the inner surface of the crucible base body, the vibration in silicon melt can be suppressed.

- 10 The thickness of the second part is preferably in a range of from 0.3 to 3 mm. In case the thickness is less than 0.3 mm, only small effect of suppressing the vibration of silicon melt can be expected; a second part at a thickness exceeding 3 mm is not preferred because there is no improvement in the effect of suppressing the vibration of the melt.
- 15 On the other hand, the yield of the silicon single crystal depends on whether the single crystal contains dislocations or not. However, most of the dislocations generate due to the surface roughening or to the generation of cristobalite spots in the later stage of the pulling up process, i.e., within a height of 0.25 H of the crucible that is brought into contact with the silicon melt for a long duration of time.
- 20 Accordingly, in the quartz glass crucible according to the present invention, the first part of the inner layer up to a height of at least 0.25 H is formed with synthetic quartz glass that is less affected by surface roughening or generation of cristobalite spots.

- The thickness of the first part of the inner layer is preferably in a range of from 0.5 to 5 mm. In case the thickness of the first part becomes less than 0.5 mm, the effect of suppressing surface roughening and cristobalite spots becomes small as to result in low yield. An thickness exceeding 5 mm is also not preferred, because it increases the production cost.

The powder of naturally occurring silica mixed with synthetic glass for forming the inner layer of the quartz glass crucible above preferably contains 30 % or more of naturally occurring silica powder.

- 5 The quartz glass crucible for pulling up silicon single crystals according to the present invention suffers less vibration of silicon melt surface on pulling up silicon single crystals and enables stable pulling up silicon single crystals at high yield without causing surface roughening or generation of cristobalite spots on the inner surface of the crucible.

Concerning the method the above mentioned object is met by a production
10 method which is characterized in that the forming of the inner layer comprises

- a) forming of a first part of the inner layer extending from the bottom to at least a height of $0.25H$ which is made of a synthetic quartz glass;
- b) forming of a second part of the inner layer, extending in a range of from at least $0.5H$ to $0.8H$, which is made of a naturally occurring quartz glass
15 or a mixed quartz glass of naturally and synthetic quartz glass;
- c) forming of a residual part of the inner layer, made from a quartz glass selected from a synthetic quartz glass, a naturally occurring quartz glass, and a mixed quartz glass of naturally and synthetic quartz glass,

wherein H represents the height from the lowest end of the bottom part to the
20 upper end plane of the wall.

A first part of the inner layer is formed to at least a height of $0.25H$ by supplying synthetic silica powder in a high temperature atmosphere and by melting and vitrifying the powder. Followed by moving upward, downward, or to the right or left, if necessary, a silica powder supply nozzle that has been used for supplying the
25 synthetic silica powder, and then forming, over a height range of at least $0.5H$ to $0.8H$, a second part of the inner layer consisting of naturally occurring quartz glass or of naturally occurring quartz glass mixed with synthetic quartz glass. This is achieved by supplying a powder of naturally occurring silica or of naturally

Here and in the following "H" represents the height from the lowest end of the bottom part to the upper end plane of the side wall as it is shown in more detail in Figure 1.

occurring silica mixed with synthetic silica from the supply nozzle.

- 5 Alternatively the second part of the inner layer is produced first by melting and vitrifying a powder of naturally occurring silica or of naturally occurring silica mixed with synthetic silica that is supplied from a silica powder supplying nozzle, followed by moving, if necessary, upward, downward, or to the right or left the silica powder supply nozzle and then forming the first part of the inner layer, which is a synthetic
- 10 quartz glass layer having a height of at least a $0.25H$ from the lowest end of the outer surface of the bottom part by melting and vitrifying the synthetic silica powder supplied from the silica powder supplying nozzle.

- In a preferred method a preliminary quartz glass layer is formed over the entire inner surface of the crucible base body by melting and vitrifying a silica powder
- 15 which is a synthetic silica powder, whereby the second part of the inner layer is formed over a height range of from $0.5H$ to $0.8H$ is formed by coating the preliminary layer with a second quartz glass layer made from naturally occurring silica powder or a powder of naturally occurring silica mixed with synthetic silica.

- Alternatively a preliminary quartz glass layer is formed over the entire inner
- 20 surface of the crucible base body by melting and vitrifying a silica powder which is a naturally occurring silica powder or a powder of naturally occurring silica mixed with synthetic silica powder, whereby the first part of the inner layer is formed over a height range to at least $0.25H$ is formed by coating the preliminary layer with a second quartz glass layer made from synthetic silica powder.

- 25 The quartz glass crucible can be produced by a simple production method comprising supplying a synthetic silica powder, a naturally occurring silica powder, or a mixed powder of naturally occurring silica and synthetic silica to each of the portions of the crucible base, and then melting and vitrifying each of the powders for forming the several parts of the inner layer.

The present invention is described more specifically below by way of examples, but it should be understood that the present invention is not only limited thereto.

Figure 1 shows a schematically drawn cross section view of the quartz glass crucible of the present invention.

- 5 **Figure 2** is a schematic drawing of the method for producing the quartz glass crucible of the present invention.

The structure of the quartz glass crucible according to the present invention is shown in **Fig. 1**.

- In **Fig. 1** are shown a quartz glass crucible 1, bottom part 2 of the crucible, side wall 3 forming a straight shell and inner layer 4, consisting of a first part which is a synthetic quartz glass layer 5, a second part, which is a layer 6 made of naturally occurring quartz glass (or alternatively it is made of naturally occurring glass mixed with synthetic glass) and a residual layer at the upper end and between first part 5 and second part 6.

- 15 **Fig. 2** shows the method for producing the quartz glass crucible according to the invention.

- In **Fig. 2** are shown a rotating mold 7, a crucible base body 8, a means for supplying silica powder 9, a plate-like lid body 10, a flow control valve 11, a power supply 12, an arc electrode 13, a silica powder supply nozzle 14, and high temperature atmosphere 15.

- The quartz glass crucible according to the present invention is formed by introducing naturally occurring silica powder from the silica powder supply means 9 into the rotating mold 7, shaping the powder into the form of the crucible, inserting the arc electrode 13 therein, and covering the aperture part of the body shaped into the crucible with a plate-like lid body 10, and thus, by using the arc electrode 13, a translucent crucible base body 8 is formed by setting the inside cavity of the crucible-like shaped body to a high temperature gaseous atmosphere and thereby melting and vitrifying at least a partially the inside of the crucible-like shaped body.

Then, a first silica powder is supplied into the high temperature atmosphere 15 from the silica powder supply means 9 while controlling the supply rate with the flow control valve 11 to thereby form a quartz glass inner layer at the desired position by melting and vitrifying the powder.

- 5 Subsequently, a synthetic silica powder is supplied to the high temperature atmosphere 15 from the silica powder supply nozzle 14, and, on forming a quartz glass layer (first part 5) at the desired position by melting and vitrifying the thus supplied silica powder, thereby forming a synthetic quartz glass inner layer 5 up to a height of 0.25H from the lowest end of the outer surface of the bottom part. "H"
- 10 represents the height from the lowest end of the bottom part to the upper end plane of the side wall.

In the same way and by using naturally occurring quartz glass powder, a second part 6 of the inner is formed on the wall in a range from 0.5H to 0.8H consisting of naturally occurring quartz glass layer.

- 15 The rest of the inner layer 4 is formed with one kind of quartz glass selected from a synthetic quartz glass, a naturally occurring quartz glass, or a naturally occurring quartz glass mixed with synthetic quartz glass.

There are several preferred production methods such as

- (i): a method comprising forming a first part of the inner quartz glass layer to at least a height of 0.25H by supplying synthetic silica powder in a high temperature atmosphere and by melting and vitrifying the powder, followed by moving upward, downward, or to the right or left, if necessary, the silica powder supply nozzle 14 that has been used for supplying the synthetic silica powder, and forming, over a height range of at least 0.5H to 0.8H a naturally occurring quartz glass powder or
- 20 a mixture of naturally occurring quartz glass and synthetic quartz glass 6 from the nozzle 14 in order to produce the second part 6 of the inner layer 4;

(ii) a method comprising forming the second part 6 of the inner layer 4 over a height range of at least 0.5H to 0.8H by melting and vitrifying a powder of naturally occurring silica or of naturally occurring silica mixed with synthetic silica that is

supplied from a silica powder supplying nozzle 14, followed by moving, if necessary, upward, downward, or to the right or left the silica powder supply nozzle 14, and then forming the first part 5 of inner layer 5 to at least a height of 0.25H from the lowest end of the outer surface of the bottom part by melting and
5 vitrifying synthetic silica powder supplied from the silica powder supplying nozzle 14; and

(iii) a method comprising forming a preliminary quartz glass inner layer over the entire inner surface of the crucible base body by melting and vitrifying a first silica powder supplied from the silica powder supply nozzle 14, followed by forming a
10 second quartz glass inner layer on the desired position by supplying a second silica powder.

In the production method (iii), preferred are to use synthetic silica powder for the first powder and a naturally occurring silica powder or a powder of naturally occurring silica mixed with synthetic silica for the second powder, such that the
15 second part of the inner layer 6 made of naturally occurring quartz glass or of naturally occurring quartz glass mixed with synthetic quartz glass is formed over a height range of from 0.5H to 0.8H.

Example 1

By using the apparatus shown in Fig. 2, high purity naturally occurring silica
20 powder subjected to purification treatment was fed into a rotating mold 7, and the powder was formed into a quartz glass crucible-like shape by the centrifugal force. Then, an arc electrode 13 was inserted into the quartz glass crucible base body, the aperture part was covered with a platy lid body 10, and a high temperature gaseous atmosphere was provided inside the inner cavity by using the arc
25 electrode 13 to melt and vitrify the base body. Thus, a translucent quartz glass crucible base body 8 was formed by cooling the molten and vitrified body. Then, after setting high temperature atmosphere 15 inside the inner cavity of the translucent quartz glass crucible base body 8 by means of arc electrode 13 while rotating the mold 7, synthetic silica powder was supplied therein at a rate of 100
30 g/min from the silica powder supply nozzle 14. In this manner, a synthetic quartz

glass inner layer 5 about 2 mm in thickness was molten and joined monolithically with the inner surface of the translucent crucible base body 8 to a height of at least 0.4H from the lowest end of the outer surface of the bottom part, where H represents the height from the lowest end of the bottom part to the upper end plane of the shell part. Then, the silica powder supply nozzle 14 was moved upward, and by supplying a powder of naturally occurring silica at a rate of 100 g/min from a silica powder supply means 9, a naturally occurring quartz glass inner layer 6 about 2 mm in thickness was molten and joined monolithically with the inner surface of the translucent crucible base body 8 over a height range of 0.4H to 1.0H. The diameter of the thus obtained quartz glass crucible was 24 inches. On pulling up single crystal according to CZ method by filling the quartz glass crucible with polycrystalline silicon and melting, perfect single crystal was obtained after operation of about 90 hours without generating any vibration on the surface of silicon melt.

15 Example 2

High purity naturally occurring silica powder subjected to purification treatment was fed into a rotating mold to form the powder into a quartz glass crucible-like shape by the centrifugal force. Then, an arc electrode was inserted into the quartz glass crucible body, the aperture part was covered with a platy lid body, and a high temperature gaseous atmosphere is provided inside inner cavity by using the arc electrode. Thus, a translucent quartz glass crucible base body was formed by cooling the molten and vitrified base body. Then, after setting high temperature atmosphere inside the translucent quartz glass crucible base body by means of arc electrode while rotating the mold, synthetic silica powder was supplied therein at a rate of 100 g/min from the silica powder supply nozzle. In this manner, a synthetic quartz glass inner layer about 2 mm in thickness was molten and joined monolithically with the inner surface of the translucent crucible base body. Subsequently, about 0.8 mm thick inner layer of naturally occurring quartz glass mixed with synthetic quartz glass was formed on the inner layer over a height range of 0.45H to 0.9H of the crucible base body by supplying synthetic silica powder at a rate of 50 g/min from the silica supply means 9 and naturally occurring silica powder at a rate of 50 g/min from the predetermined position

through the silica supply nozzle above. The diameter of the thus obtained quartz glass crucible was 24 inches. On pulling up single crystal according to CZ method by filling the quartz glass crucible with polycrystalline silicon and melting, perfect single crystal was obtained after operation of about 90 hours without generating any vibration on the surface of silicon melt.

Comparative Example 1

By using the apparatus shown in Fig. 2, high purity naturally occurring silica powder subjected to purification treatment was fed into a rotating mold 7, and the powder was formed into a quartz glass crucible-like shape by the centrifugal force.

10 Then, an arc electrode 13 was inserted into the quartz glass crucible base body, the aperture part was covered with a platy lid body 10, and a high temperature gaseous atmosphere was provided inside the inner cavity by using the arc electrode 13 to melt and vitrify the base body. Thus, a translucent quartz glass crucible base body 8 was formed by cooling the molten and vitrified body. Then,

15 after setting high temperature atmosphere 15 inside the inner cavity of the translucent quartz glass crucible base body 8 by means of arc electrode 13 while rotating the mold 7, synthetic silica powder was supplied therein at a rate of 100 g/min. In this manner, a synthetic quartz glass inner layer about 2 mm in thickness was molten and joined monolithically with the inner surface of the

20 translucent crucible base body 8. The diameter of the thus obtained quartz glass crucible was 24 inches. On pulling up single crystal according to CZ method by filling the quartz glass crucible with polycrystalline silicon and melting, vigorous vibration was generated on the surface of the silicon melt to find seeding operation and consecutive operations unfeasible.

25 Comparative Example 2

By using the apparatus shown in Fig. 2, high purity naturally occurring silica powder subjected to purification treatment was fed into a rotating mold 7, and the powder was formed into a quartz glass crucible-like shape by the centrifugal force.

Then, an arc electrode 13 was inserted into the quartz glass crucible base body,

30 the aperture part was covered with a platy lid body 10, and a high temperature

- 12 -

gaseous atmosphere was provided inside the inner cavity by using the arc electrode 13 to melt and vitrify the base body. Thus, a translucent quartz glass crucible base body 8 was formed by cooling the molten and vitrified body. Then, after setting high temperature atmosphere 15 inside the inner cavity of the translucent quartz glass crucible base body 8 by means of arc electrode 13 while rotating the mold 7, naturally occurring silica powder was supplied therein at a rate of 100 g/min. In this manner, a naturally occurring quartz glass inner layer about 2 mm in thickness was molten and joined monolithically with the inner surface of the translucent crucible base body 8. The diameter of the thus obtained quartz glass crucible was 24 inches. On pulling up single crystal according to CZ method by filling the quartz glass crucible with polycrystalline silicon and melting, perfect crystal was found unfeasible because disordering is generated on the single crystal after passage of about 50 hours, although no vibration is generated on the surface of the silicon melt.

15

Claims

1. A quartz glass crucible for pulling up single crystal silicon, comprising a crucible base body having a bottom part and a side wall, with an inner layer provided to the inner surface thereof, characterized in that said inner layer comprises
- 5 a) a first part made of a synthetic quartz extending from the bottom to at least a height of $0.25H$;
- b) a second part made of a naturally occurring quartz glass or made of mixed quartz glass of naturally and synthetic quartz glass extending in a
- 10 range of from at least $0.5H$ to $0.8H$;
- c) and a residual part made of quartz glass selected from a synthetic quartz glass, a naturally occurring quartz, or a mixed quartz glass of naturally and synthetic quartz glass,
- wherein H represents the height from the lowest side of the bottom part to the upper end plane of the wall.
- 15 2. A quartz glass crucible according to claim 1, wherein the mixing ratio for the naturally occurring silica powder in the mixed powder of naturally occurring silica and synthetic silica for forming the mixed quartz glass of naturally occurring quartz glass and synthetic quartz glass accounts for 30 % or
- 20 higher.
3. A quartz glass crucible according to claim 1, wherein the thickness of the second part is preferably in a range of from 0.3 to 3 mm.
4. A quartz glass crucible according to claim 1, wherein the thickness of the first part of the inner layer is preferably in a range of from 0.5 to 5 mm.
- 25 5. A method for producing a quartz glass for pulling up single crystal silicon comprising a crucible base body having a bottom part and a side wall enclosing an inner cavity portion, by setting a high temperature atmosphere

inside the cavity portion of the quartz glass crucible base body being attached to a rotating mold, and supplying a silica powder into said high temperature atmosphere to form an inner layer on the inner surface of the crucible base body by melting and vitrifying the silica powder, characterized in that the forming of the inner layer comprises

- a) forming of a first part of the inner layer extending from the bottom to at least a height of $0.25H$ which is made of a synthetic quartz glass;
- b) forming of a second part of the inner layer, extending in a range of from at least $0.5H$ to $0.8H$, which is made of a naturally occurring quartz glass or a mixed quartz glass of naturally and synthetic quartz glass;
- c) forming of a residual part of the inner layer, made from a quartz glass selected from a synthetic quartz glass, a naturally occurring quartz glass, and a mixed quartz glass of naturally and synthetic quartz glass,


wherein H represents the height from the lowest end of the bottom part to the upper end plane of the wall.

6. A method according to claim 5, wherein for supplying the silica powder into the high temperature atmosphere a supplying nozzle is used, by which synthetic silica-powder is supplied to a first part in order to form the inner layer on the bottom part of the crucible base and in the vicinity thereof, and then moving the supply nozzle in order to supply naturally occurring silica powder or a mixed powder of naturally occurring silica or synthetic silica to a second part being a separate from the first part, in order to form the second part of the inner layer on the crucible base body.
7. A method according to claim 5, wherein the inner layer is produced by forming a preliminary quartz glass layer on the entire inner surface of the crucible base body by supplying a first silica powder into the high temperature atmosphere whereby the first silica powder is naturally occurring silica powder or a mixed powder of naturally occurring silica and synthetic silica, and melting and vitrifying the first silica powder, and then


forming the first part of the inner layer by supplying, melting and vitrifying a synthetic silica powder.

8. A method according to claim 5, wherein the inner layer is produced by forming a preliminary quartz glass layer on the entire inner surface of the crucible base body by supplying a synthetic silica powder into the high temperature atmosphere and melting and vitrifying the synthetic silica powder, and then forming the second part of the inner layer by supplying, melting and vitrifying a silica powder which is naturally occurring silica powder or a mixed powder of naturally occurring silica and synthetic silica.

[Fig. 1]

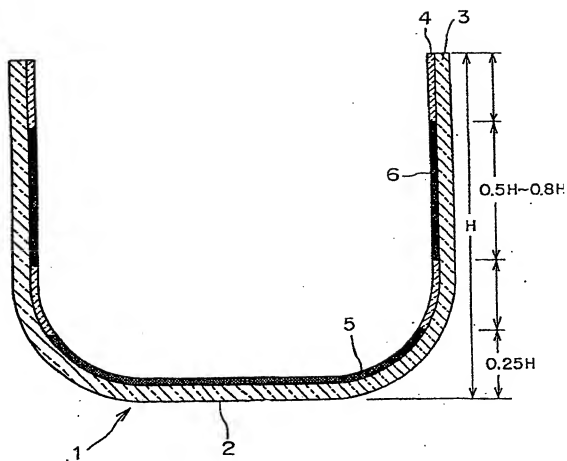

[Fig. 2]

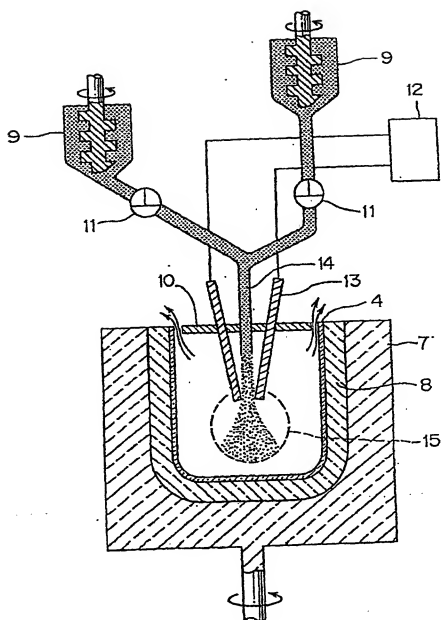

INTERNATIONAL SEARCH REPORT

International Application No
PCT/EP 03/08422

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 C30B15/10

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 C30B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

PAJ, EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 306 473 A (TAKARIKI KAZUHIKO ET AL) 26 April 1994 (1994-04-26) column 4-6; claim 1	1, 5
A	US 5 306 388 A (ITO TOHRU ET AL) 26 April 1994 (1994-04-26) column 4-6; claim 1	1, 5
A	WO 01 92609 A (HERAEUS QUARZGLAS; MIZUNO SHIGEO (JP); OHAMA YASUO (JP); MATSUI HI) 6 December 2001 (2001-12-06) the whole document	5
A	& JP 2001 348294 A (HERAEUS QUARZGLAS) 18 December 2001 (2001-12-18) cited in the application	

-/--

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubt on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

Z document member of the same patent family

Date of the actual completion of the international search

25 November 2003

Date of mailing of the international search report

03/12/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl
Fax: (+31-70) 340-3016

Authorized officer

Cook, S

INTERNATIONAL SEARCH REPORT

International Application No
PCT/EP 03/08422

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>EP 1 024 118 A (HERAEUS QUARZGLAS ;SHINETSU QUARTZ PROD (JP)) 2 August 2000 (2000-08-02) the whole document</p> <p>-----</p>	5

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 03/08422

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5306473	A	26-04-1994	NONE	
US 5306388	A	26-04-1994	JP 2714860 B2 JP 3060490 A	16-02-1998 15-03-1991
WO 0192609	A	06-12-2001	JP 2001348294 A WO 0192609 A2 EP 1290250 A2 US 2002192409 A1	18-12-2001 06-12-2001 12-03-2003 19-12-2002
EP 1024118	A	02-08-2000	JP 2000219593 A EP 1024118 A2	08-08-2000 02-08-2000